650V Super-Junction Power MOSFET

FEATURES

- Very low FOM $R_{DS(on)} \times Q_g$
- 100% avalanche tested
- RoHS compliant

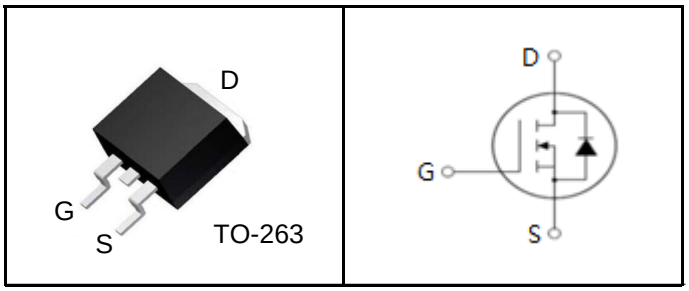

APPLICATIONS

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)

RoHS

Device Marking and Package Information		
Device	**Package**	**Marking**
MPSC65M260	TO-263	MP65M260

Absolute Maximum Ratings T_C = 25ºC, unless otherwise noted			
Parameter	**Symbol**	**Value**	**Unit**
Drain-Source Voltage (V_{GS} = 0V)	V_{DSS}	650	V
Continuous Drain Current	I_D	15	A
Pulsed Drain Current (note1)	I_{DM}	45	A
Gate-Source Voltage	V_{GSS}	±30	V
Single Pulse Avalanche Energy (note2)	E_{AS}	290	mJ
Avalanche Current (note1)	I_{AR}	2.4	A
Repetitive Avalanche Energy (note1)	E_{AR}	0.44	mJ
MOSFET dv/dt ruggedness, V_{DS}=0…400 V	dv/dt	50	V/ns
Reverse diode dv/dt, V_{DS}=0…400 V, $I_{SD} \leq I_D$	dv/dt	15	V/ns
Power Dissipation (T_C = 25ºC)	P_D	105	W
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	ºC

Thermal Resistance			
Parameter	**Symbol**	**Value**	**Unit**
Thermal Resistance, Junction-to-Case	R_{thJC}	1.2	K/W
Thermal Resistance, Junction-to-Ambient	R_{thJA}	62	

marching-power© Copyright reserved

Specifications T_J = 25ºC, unless otherwise noted						
Parameter	**Symbol**	**Test Conditions**	**Value**			**Unit**
			Min.	**Typ.**	**Max.**	
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	650	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 650V, V_{GS} = 0V, T_J = 25ºC	--	--	1	μA
		V_{DS} = 650V, V_{GS} = 0V, T_J = 150ºC	--	--	100	
Gate-Source Leakage	I_{GSS}	V_{GS} = ±30V	--	--	±100	nA
Gate-Source Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	2.5	--	3.5	V
Drain-Source On-Resistance (Note3)	$R_{DS(on)}$	V_{GS} = 10V, I_D = 7.5A	--	0.23	0.260	Ω
Gate Resistance	R_G	f = 1.0MHz, open drain	--	12	--	Ω
Dynamic						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 100V, f = 1.0MHz	--	1170	--	pF
Output Capacitance	C_{oss}		--	51	--	
Reverse Transfer Capacitance	C_{rss}		--	7	--	
Total Gate Charge	Q_g	V_{DD} = 520V, I_D = 15A, V_{GS} = 10V	--	27	--	nC
Gate-Source Charge	Q_{gs}		--	5.5	--	
Gate-Drain Charge	Q_{gd}		--	10.5	--	
Turn-on Delay Time	$t_{d(on)}$	V_{DD} = 400V, I_D = 15A , V_{GS} = 10V, R_G = 25 Ω	--	25	--	ns
Turn-on Rise Time	t_r		--	65	--	
Turn-off Delay Time	$t_{d(off)}$		--	105	--	
Turn-off Fall Time	t_f		--	50	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I_S	T_C = 25ºC	--	--	15	A
Pulsed Diode Forward Current	I_{SM}		--	--	45	
Body Diode Voltage	V_{SD}	T_J = 25ºC, I_{SD} = 15A, V_{GS} = 0V	--	0.9	1.2	V
Reverse Recovery Time	t_{rr}	V_R = 400V, I_F = 15A, di_F/dt = 100A/μs	--	410	--	ns
Reverse Recovery Charge	Q_{rr}		--	4	--	μC
Peak Reverse Recovery Current	I_{rrm}		--	20	--	A

Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. I_{AS} = 2.4A, V_{DD} = 50V, R_G = 25Ω, Starting T_J = 25°C
3. Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 1%

marching-power© Copyright reserved

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 1. Output Characteristics

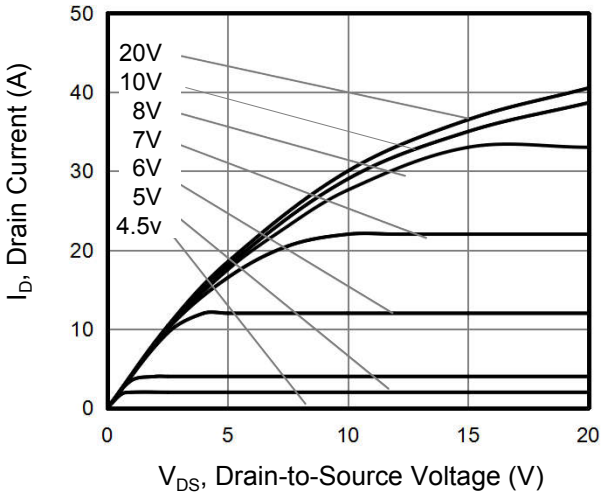

Figure 2. Transfer Characteristics

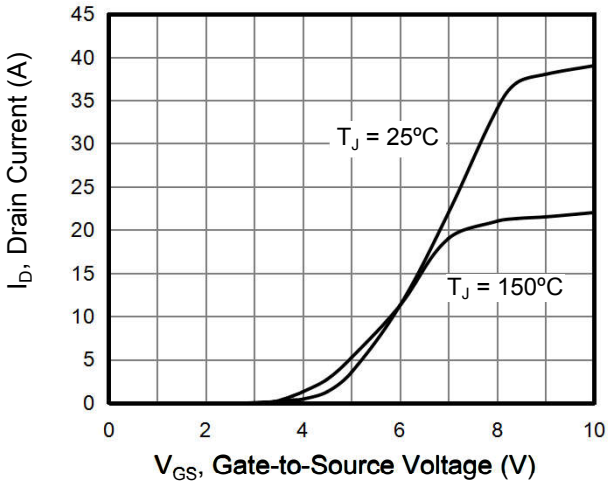

Figure 3. On-Resistance vs. Drain Current

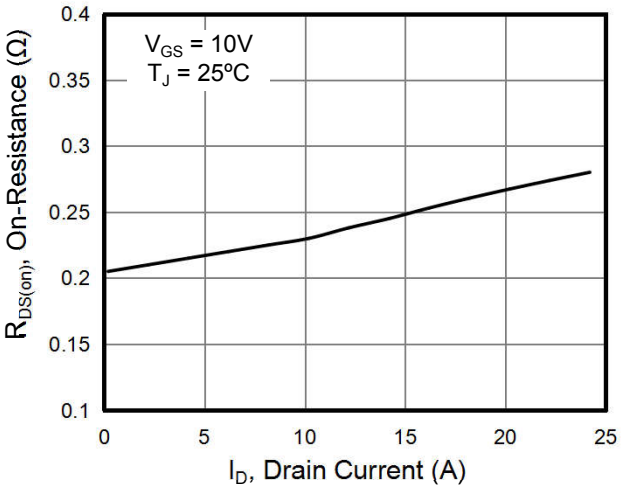

Figure 4. Capacitance

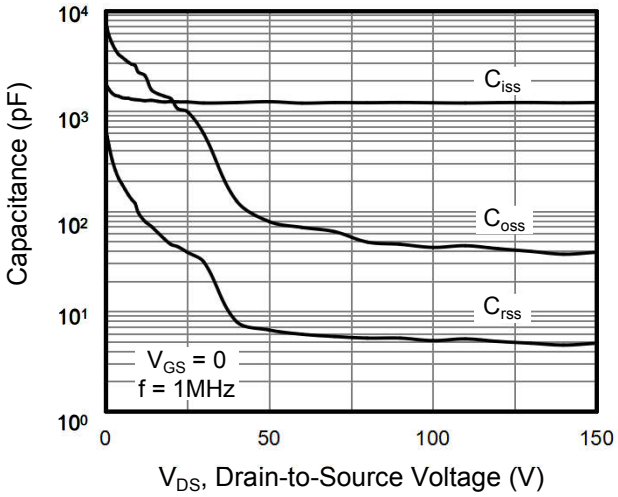

Figure 5. Gate Charge

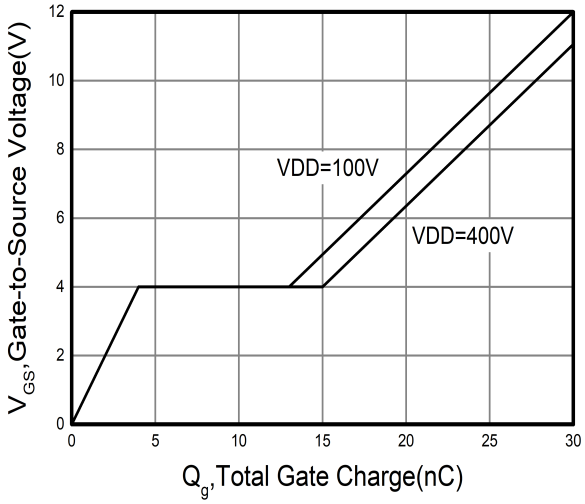

Figure 6. Body Diode Forward Voltage

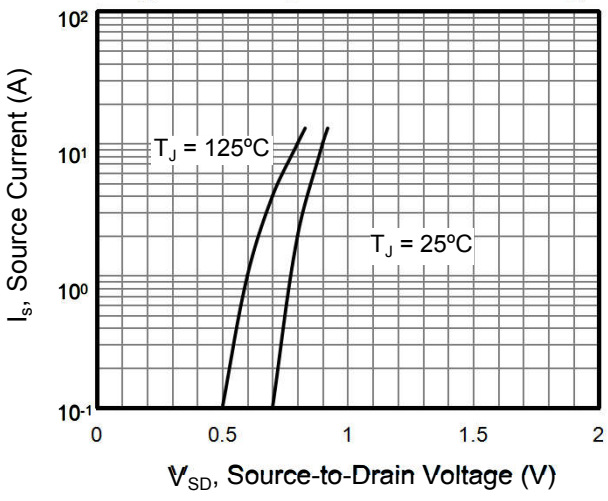

marching-power© Copyright reserved

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 7. On-Resistance vs. Junction Temperature

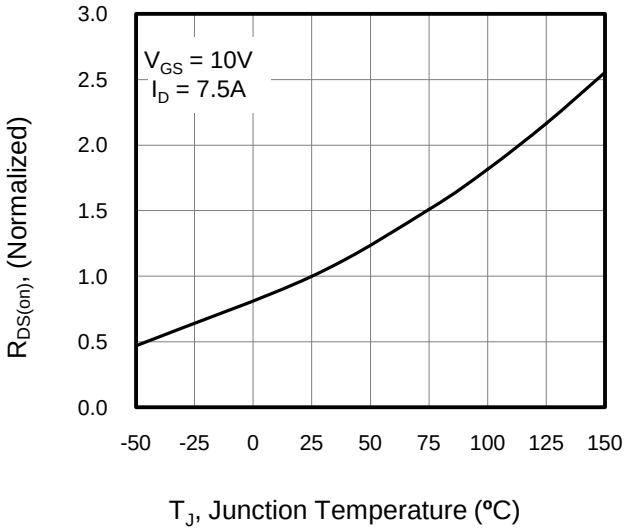

Figure 8. Breakdown voltage vs. Junction Temperature

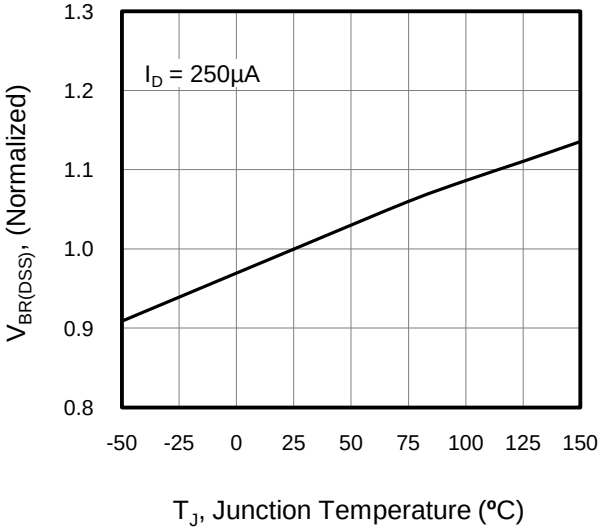

Figure 9. Transient Thermal Impedance

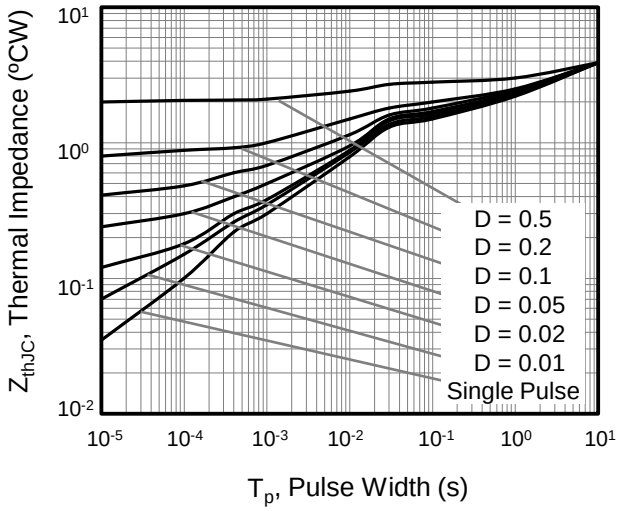

Figure A：Gate Charge Test Circuit and Waveform

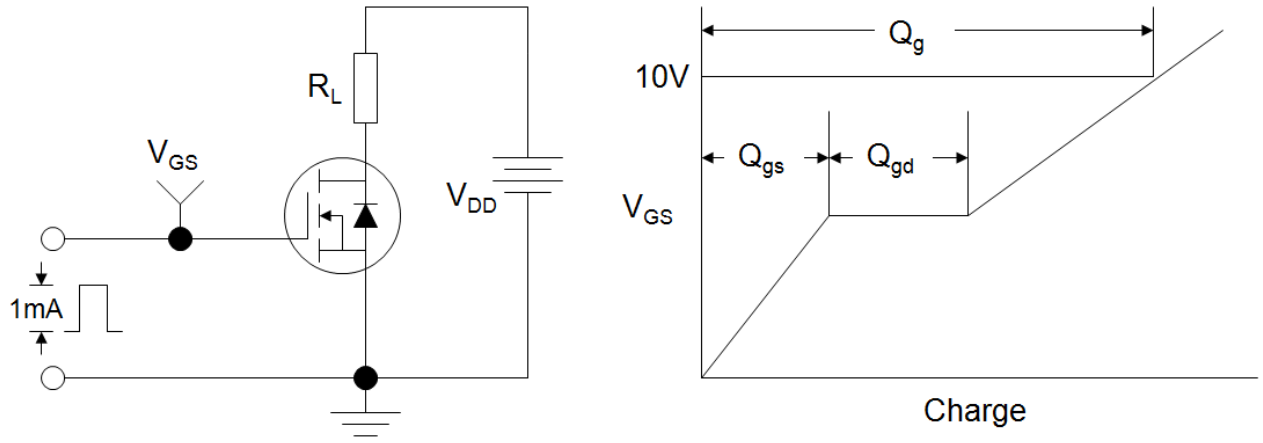

Figure B：Resistive Switching Test Circuit and Waveform

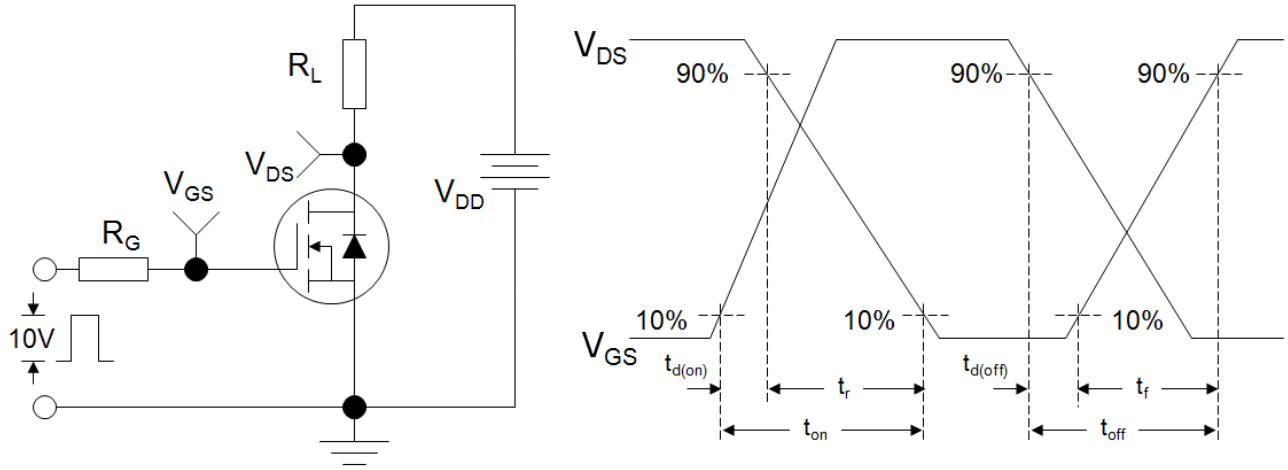

Figure C：Unclamped Inductive Switching Test Circuit and Waveform

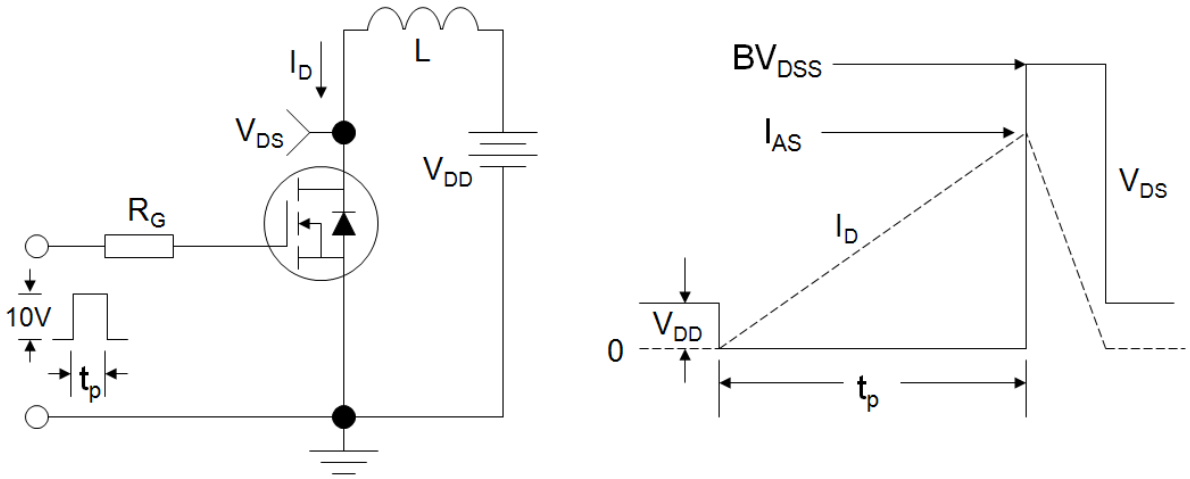

Package Dimension

unit: mm

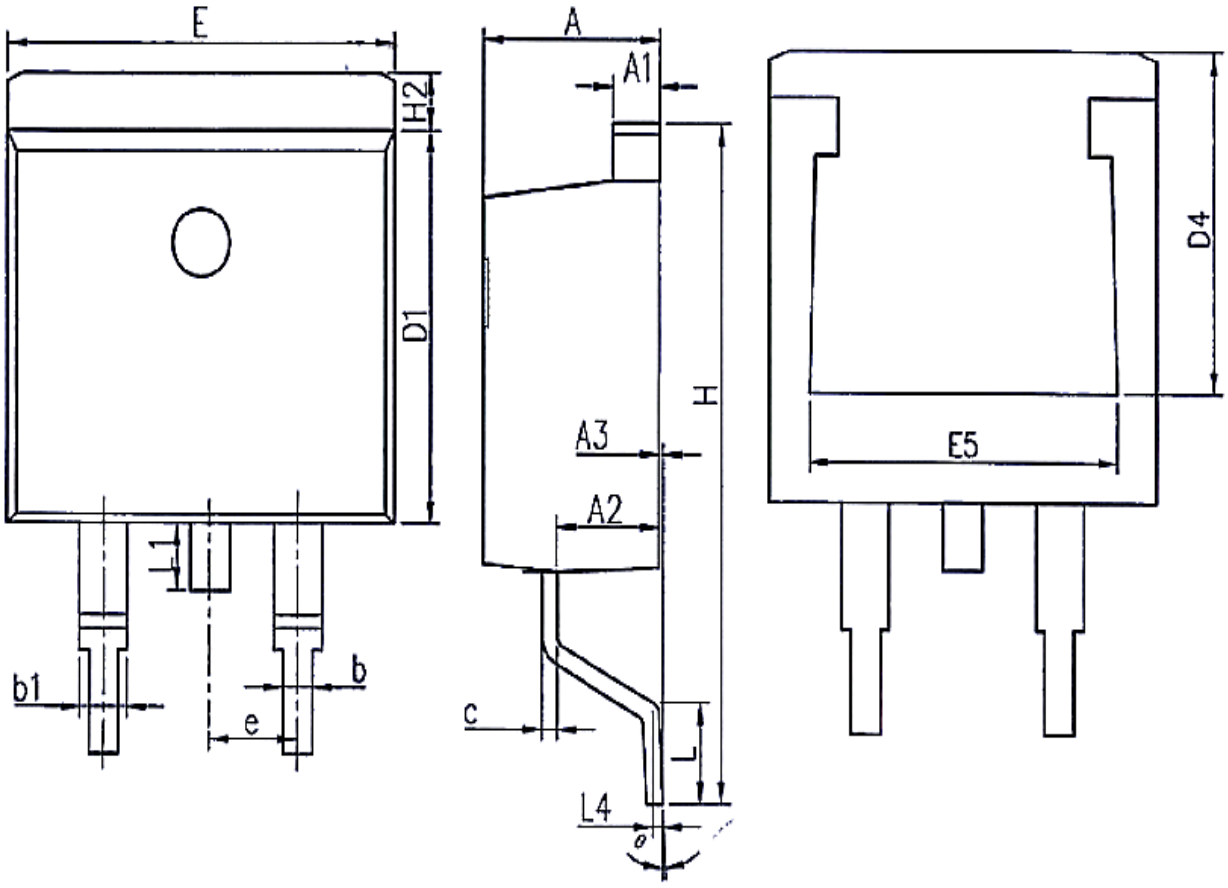

Unit:mm			
Symbol	Min.	Nom	Max.
A	4.37	4.57	4.77
A1	1.22	1.27	1.42
A2	2.49	2.69	2.89
A3	0.00	0.13	0.25
b	0.70	0.81	0.96
b1	1.17	1.27	1.47
c	0.30	0.38	0.53
D1	8.50	8.70	8.90
D4	6.60	-	-

Unit:mm			
Symbol	Min.	Nom	Max.
E	9.86	10.16	10.36
E5	7.06	-	-
e	2.54BSC		
H	14.70	15.10	15.50
H2	1.07	1.27	1.47
L	2.00	2.30	2.60
L1	1.40	1.55	1.70
L4	0.25BSC		
θ	0°	5°	9°

PIN Connections
1. Gate
2. Drain
3. Source

marching-power© Copyright reserved